


E-Line T4-7.5-4

GORMAN-RUPP E-LINE GENERAL DESCRIPTION



The Gorman-Rupp E-Line T4-7.5-4 is an electric driven self-priming centrifugal pump set for pumping clean, dirty and sewage water.

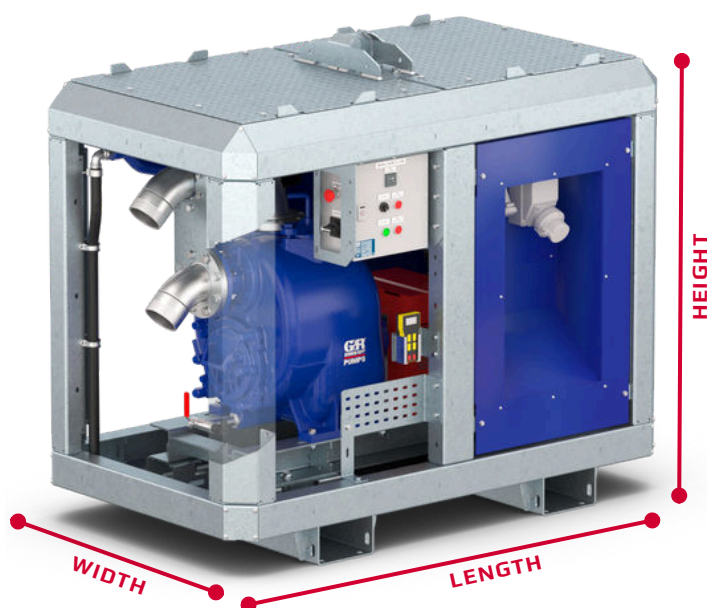

WEIGHT

Approx. 910 kg

OPERATION

Control panel with main switch, emergency switch, pump on/off, hour counter and speed control. See rear side for more options.

COUPLING AND GUARD

Rubber tyre coupling, steel guard RAL 3002 (red)


CHASSIS

Heavy gauge steel chassis, fully galvanized. Steel protective panels, galvanized, with an additional epoxy layer and powder coated RAL 5003 with a total dry film thickness of approx. 120 micron



PUMP

Gorman-Rupp T4A60S-B self-priming centrifugal pump



ELECTRIC MOTOR

7,5 kW IE3 premium efficiency electric motor with integrated variable frequency drive(VFD)



IMPELLER

9,75" Impeller made of ductile iron
76,2 mm solid handling capacity



PERFORMANCE

Max.167 m3/h flow or
26 mWc discharge head



DIMENSIONS

4" x 4" BSP-T Connection size
L: 1,75 m W: 1 m H: 1,51 m




SOUND

max. 75 dB, measured at 1 meter distance and 1 meter height



WARRANTY

5-year Gorman-Rupp warranty on the pump,
1-year on the motor and other components

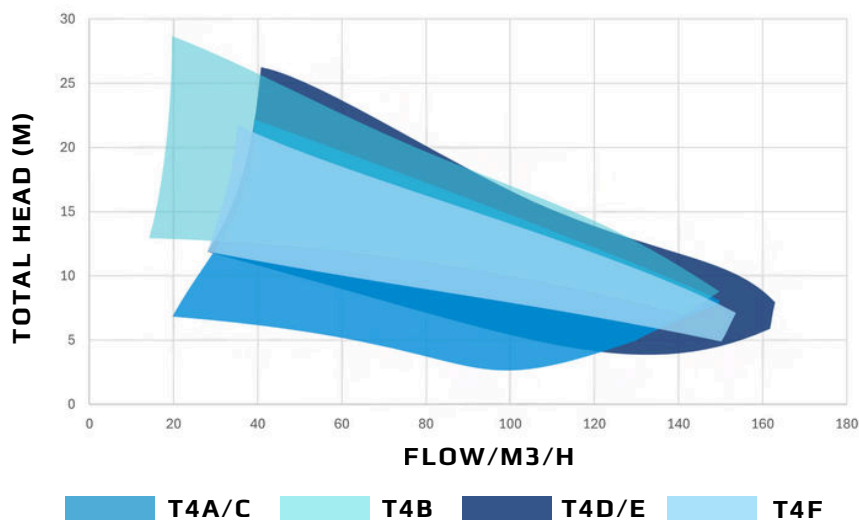

*Pump performance curve is based on water with a SG=1.0 and without additional accessories.

E line
Electric Powered Pumps

The Pump People®

WHERE BLUE MEETS GREEN



E-Line T4-7.5-4

GORMAN-RUPP E-LINE TECHNICAL SPECIFICATIONS



PUMP

Solids handling
Max. working pressure
Impeller
Pump shaft bearings
Bearing and seal cavity lubrication
Shaft sealing

T4A60S-B (standard version, see curves and table below for optional hydraulics. Check E-Line brochure page 42 for material codes)

76,2 mm
86 psi (593 kPa)
9,75 " Semi-Open, Two Vane Ductile Iron 65-45-12
Open Single Row Ball Bearings
SAE 30 Non-Detergent Oil
Mechanical cartridge type seal with Silicon Carbide / Silicon Carbide faces and Fluorocarbon FKM, (Viton® or Equivalent) Elastomers.
Standard Plated Steel
Bearing and Seal Cavity Oil Level Sight Gauges
Gray Iron 30
Ductile Iron 65-45-12
Alloy Steel 4150
Alloy Steel 4130
Carbon Steel ASTM A36
Neoprene with Nylon and Steel Reinforcing
Gray Iron 30
Gray Iron 30
Buna-N, with Compressed Synthetic Fiber, Vegetable Fiber, PTFE, Cork and Rubber
Buna N

Fasteners
Oil sight glasses
Pump casing
Material Impeller
Impeller Shaft
Shaft sleeve
Wear plate
Check valve
Seal plate
Bearing housing
Gaskets

O-Rings



AVAILABLE MODELS

<u>Model</u>	<u>Max. flow</u>	<u>Max. discharge head</u>	<u>Max.RPM</u>	<u>Min.RPM</u>
T4A-7.5-4	150 m3/h	22 mWc	1550	850
T4B-7.5-4	150 m3/h	26 mWc	1750	850
T4C-7.5-4	150 m3/h	21 mWc	1550	850
T4D-7.5-4	162 m3/h	26 mWc	1750	1050
T4E-7.5-4	167 m3/h	25 mWc	1750	1050
T4F-7.5-4	150 m3/h	21 mWc	1550	1150

CHASSIS DESIGN

Chassis Heavy gauge steel chassis, fully galvanized
Corrosion protection Hot-dip galvanized
Protective panels Steel protective panels, galvanized with an additional epoxy layer and powder coated RAL 5003

ELECTRIC MOTOR

Brand HOYER
Model HMA3
Maximum Power 7,5 kW
Efficiency Class IE3 Premium Efficiency
Variable Frequency Drive (VFD) Hoyer, Integrated in the pump set

OPTIONS

Discharge Check Valve
Air Release Valve
High Temperature Shutdown Kit
Remote Control
Float Switch
Level Sensor
Custom Colors

CONTROL PANEL

Functionalities Main switch, emergency switch, pump on/off, hour counter and speed control
IP Rating of the Cabinet IP44
Earthing System 5 wire Terra-Neutral Separated (TN-S) connection
CEE Plug 32A 5P 400V

