

# E-Line

## T10-30-6

# GORMAN-RUPP

## E-LINE

### GENERAL DESCRIPTION



The Gorman-Rupp E-Line T10-30-6 is an electric driven self-priming centrifugal pump set for pumping clean, dirty and sewage water.



#### WEIGHT

Approx. 2740 kg

#### OPERATION


Control panel with main switch, emergency switch, pump on/off, hour counter and speed control. See rear side for more options.

#### COUPLING AND GUARD

Rubber tyre coupling, integrated protective guard

#### CHASSIS


Heavy gauge steel chassis, fully galvanized. Steel protective panels, galvanized, with an additional epoxy layer and powder coated RAL 5003 with a total dry film thickness of approx. 120 micron

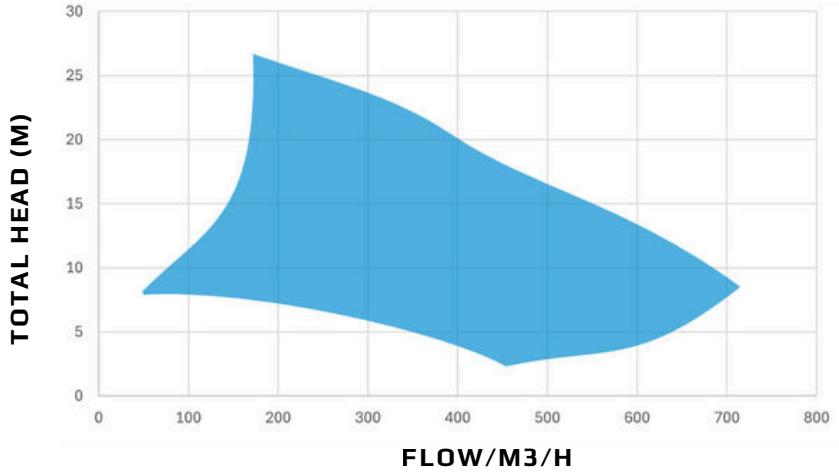

\*Pump performance curve is based on water with a SG=1.0 and without additional accessories.



PUMP  
Gorman-Rupp T10A605-B  
self-priming centrifugal pump



ELECTRIC MOTOR  
30 kW IE4 Super premium efficiency electric motor with variable frequency drive (VFD) integrated in the pump set



IMPELLER  
14,75" Impeller made of Ductile Iron 65-45-12  
76,2 mm solid handling capacity



PERFORMANCE  
Max. 720 m3/h flow or 26,5 mWc discharge head



DIMENSIONS  
10" x 10" xxx connection size  
L: 3,22 m W: 1,35 m H: 2,07 m



SOUND  
max. 75 dB, measured at 1 meter distance and 1 meter height



WARRANTY  
5-year Gorman-Rupp warranty on the pump,  
1-year on the motor and other components

**E line**  
Electric Powered Pumps

*The Pump People®*

WHERE BLUE MEETS GREEN



# E-Line

## T10-30-6

# GORMAN-RUPP

## E-LINE

### TECHNICAL SPECIFICATIONS



#### PUMP

**T10A60S-B** (Standard version, see curves and table below for optional hydraulics.  
Check E-Line brochure for material codes)

Solids handling	76,2 mm
Max. working pressure	99 psi (683 kPa)
Impeller	14,75" Semi-Open, Two Vane Ductile Iron 65-45-12
Bearing and seal cavity lubrication	SAE 30 Non-Detergent Oil
Shaft sealing	Mechanical cartridge type seal with Silicon Carbide / Silicon Carbide faces and Fluorocarbon FKM, (Viton® or Equivalent)
	Elastomers.
Fasteners	Standard Plated Steel
Oil sight glasses	Bearing and Seal Cavity Oil Level Sight Gauges
Pump casing	Gray Iron 30
Material Impeller	Ductile Iron 65-45-12
Impeller Shaft	Stainless Steel 17-4 PH
Shaft sleeve	Alloy Steel 4130
Seal plate	Gray Iron 30
Bearing housing	Gray Iron 30
Gaskets	Buna-N, with Compressed Synthetic Fiber, Vegetable Fiber, PTFE, Cork and Rubber
O-Rings	Buna N

#### AVAILABLE MODELS

Model	Max. flow	Max. discharge head	Impeller Type	Solid handling	Design Feature	Materials
T10A-30-6	720 m3/h	26,5 mWc	Semi-open, two vane	76,2 mm	Solids-handling (SH)	Cast Iron, CD4MCu
T10C-30-6	720 m3/h	25 mWc	Semi-open, two vane	76,2 mm	SH + Eradicator®	Cast Iron



#### CHASSIS DESIGN

Chassis	Heavy gauge steel chassis, fully galvanized
Corrosion protection	Hot-dip galvanized
Protective panels	Steel protective panels, galvanized with an additional epoxy layer and powder coated RAL 5003

#### ELECTRIC MOTOR

Brand	WEG
Model	W22
Maximum Power	30,0 kW
Efficiency Class	IE4 Super Premium Efficiency
Variable Frequency Drive (VFD)	Euradrive, integrated in the pump set

#### OPTIONS

Air Release Valve
High Temperature Shutdown Kit
Remote Control
Float Switch
Level Sensor
Custom Colors

#### CONTROL PANEL

Functionalities	Main switch, emergency switch, pump on/off, hour counter and speed control
IP Rating of the Cabinet	IP44
Earthing System	5 wire Terra-Neutral Separated (TN-S) connection
CEE Plug	63A 5P 400V

